



Technical data

Date	9/22/2025
Offer N.	---
Pump Type	SP60G



Client	EES GmbH	Reference	---
--------	----------	-----------	-----

Pump data

Pump body	Polypropylene	Drainage pump for emptying pits and cisterns, for gardening; completely constructed in anticorrosive material. The single phase versions have an internal capacitor and thermal motorprotector.
Impeller	Noryl®	
Mechanical seal	Double lip seal	
Motor shaft	Stainless steel AISI 416 with ceramic bush	
Passage of solids	Ø max 4 mm	
Allowed depth of immersion	Max 5 m	
Liquid temperature	0°C +40°C	
Cable	H07 RN8F, 10 m	
Float switch	Only for single-phase pump version G	

P1 (W)	A	Q (m3/h - l/min)						
	1x230V	0	1.2	2.4	3.6	4.8	6	7.2
		0	20	40	60	80	100	120
		H (m)						
400	2.1	8.5	8.1	7.6	6.7	5	3.9	2.6

Technical Sheet

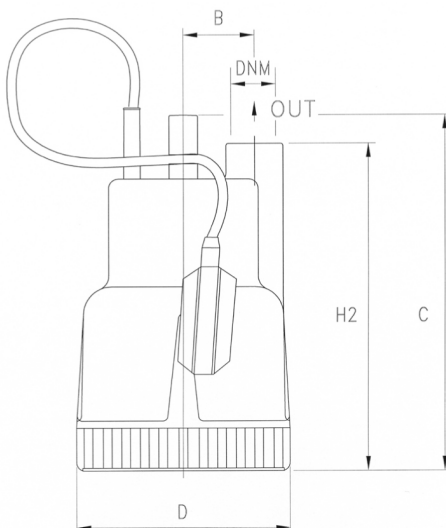

DIMENSIONS (mm)				DNM	PACKAGING (mm)			Kg
B	C	D	H2		I	L	M	
50	250	150	230	1" G	170	200	320	4,2

Notes

The information may be subject to change without notice. It is always advisable to contact our commercial department in order to get further information about the products, their technical specifications and warranty conditions. The Company is expressly relieved of any liability for the purchasing of a product not in line with the customer's needs, if not consulted beforehand for a specific consultancy.



Working Curves

Pump type: SP60G

Curv n°:

SP60G

Date:

9/22/2025

Q (l/min) 75 | H (m) 6.3 | Power [kW] - | Efficiency % - | NPSH (m) -

